AVK BALL CHECK VALVES - PRESSURE LOSS, DN50, DN65 AND DN80 VERTICAL INSTALLATION

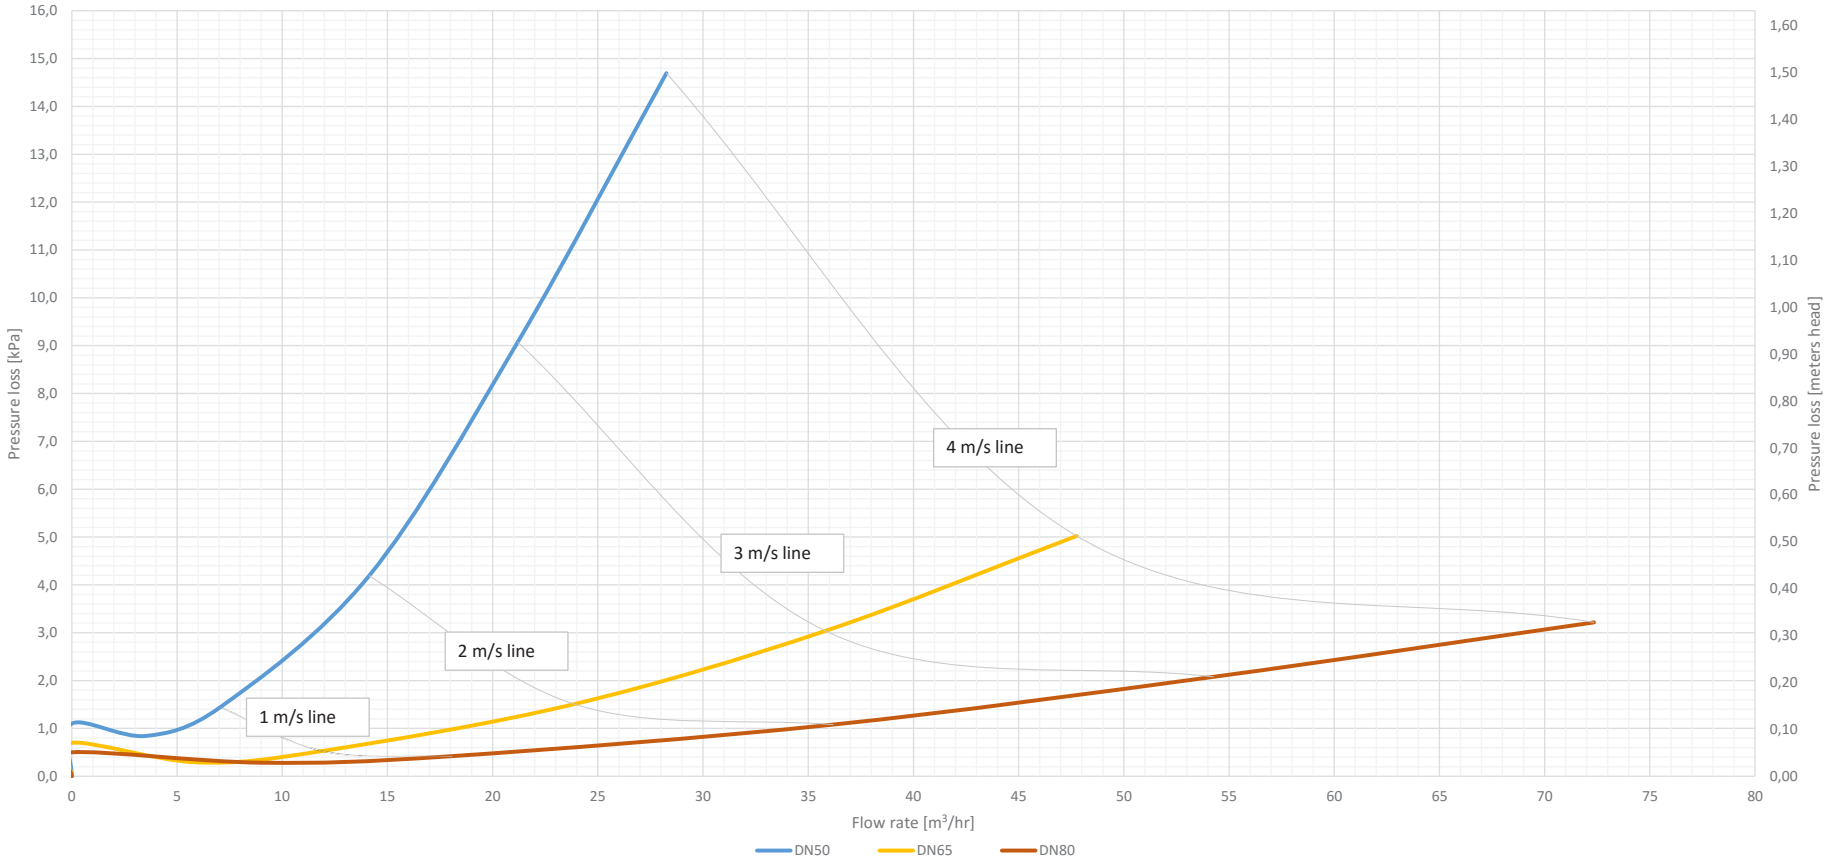

These curves are based on tests, performed according to EN1267, with a vertical installation.

All ball check valves are fully open at approx. 0,5m/s. Opening pressure presupposes that pipes are full of water, both at upstream and downstream.

COPYRIGHT©AVK GROUP A/S 2025 - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu

AVK BALL CHECK VALVES - PRESSURE LOSS, DN100, DN125, DN150 AND DN200 VERTICAL INSTALLATION

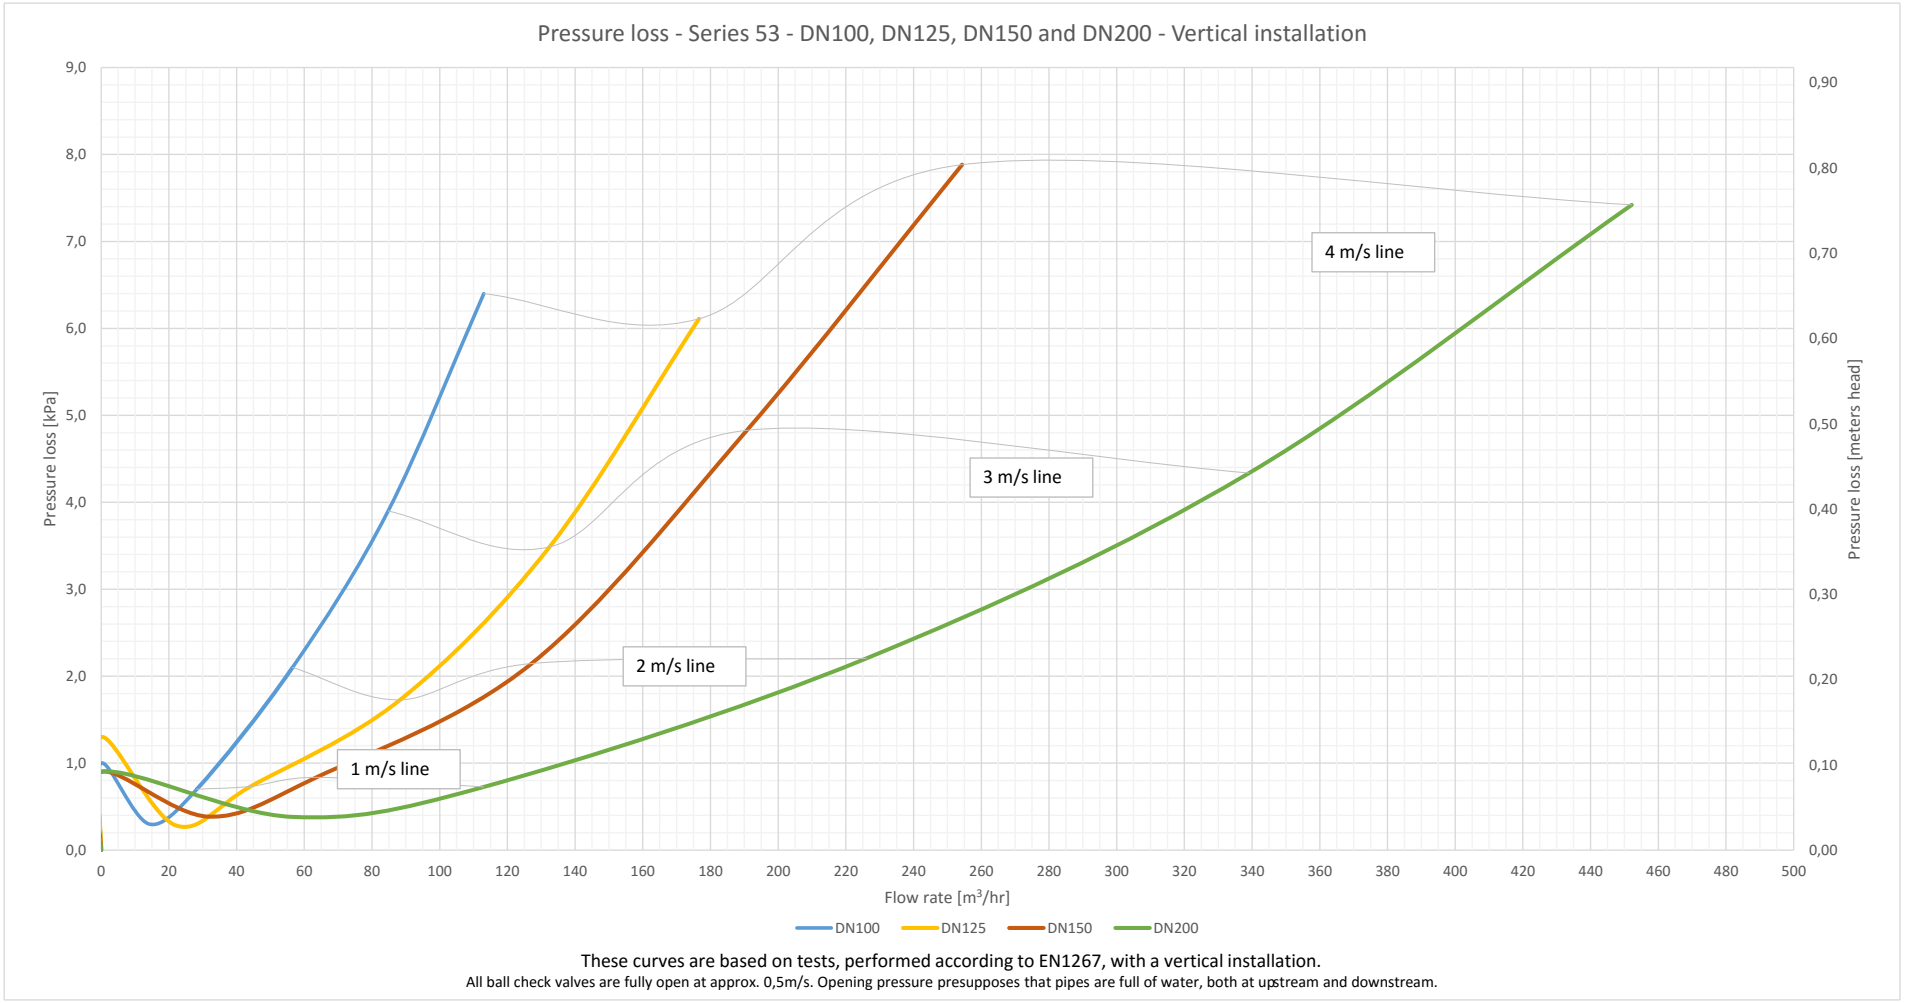

These curves are based on tests, performed according to EN1267, with a vertical installation.
All ball check valves are fully open at approx. 0,5m/s. Opening pressure presupposes that pipes are full of water, both at upstream and downstream.

COPYRIGHT©AVK GROUP A/S 2025 - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu

AVK BALL CHECK VALVES - PRESSURE LOSS, DN250 AND DN300 VERTICAL INSTALLATION

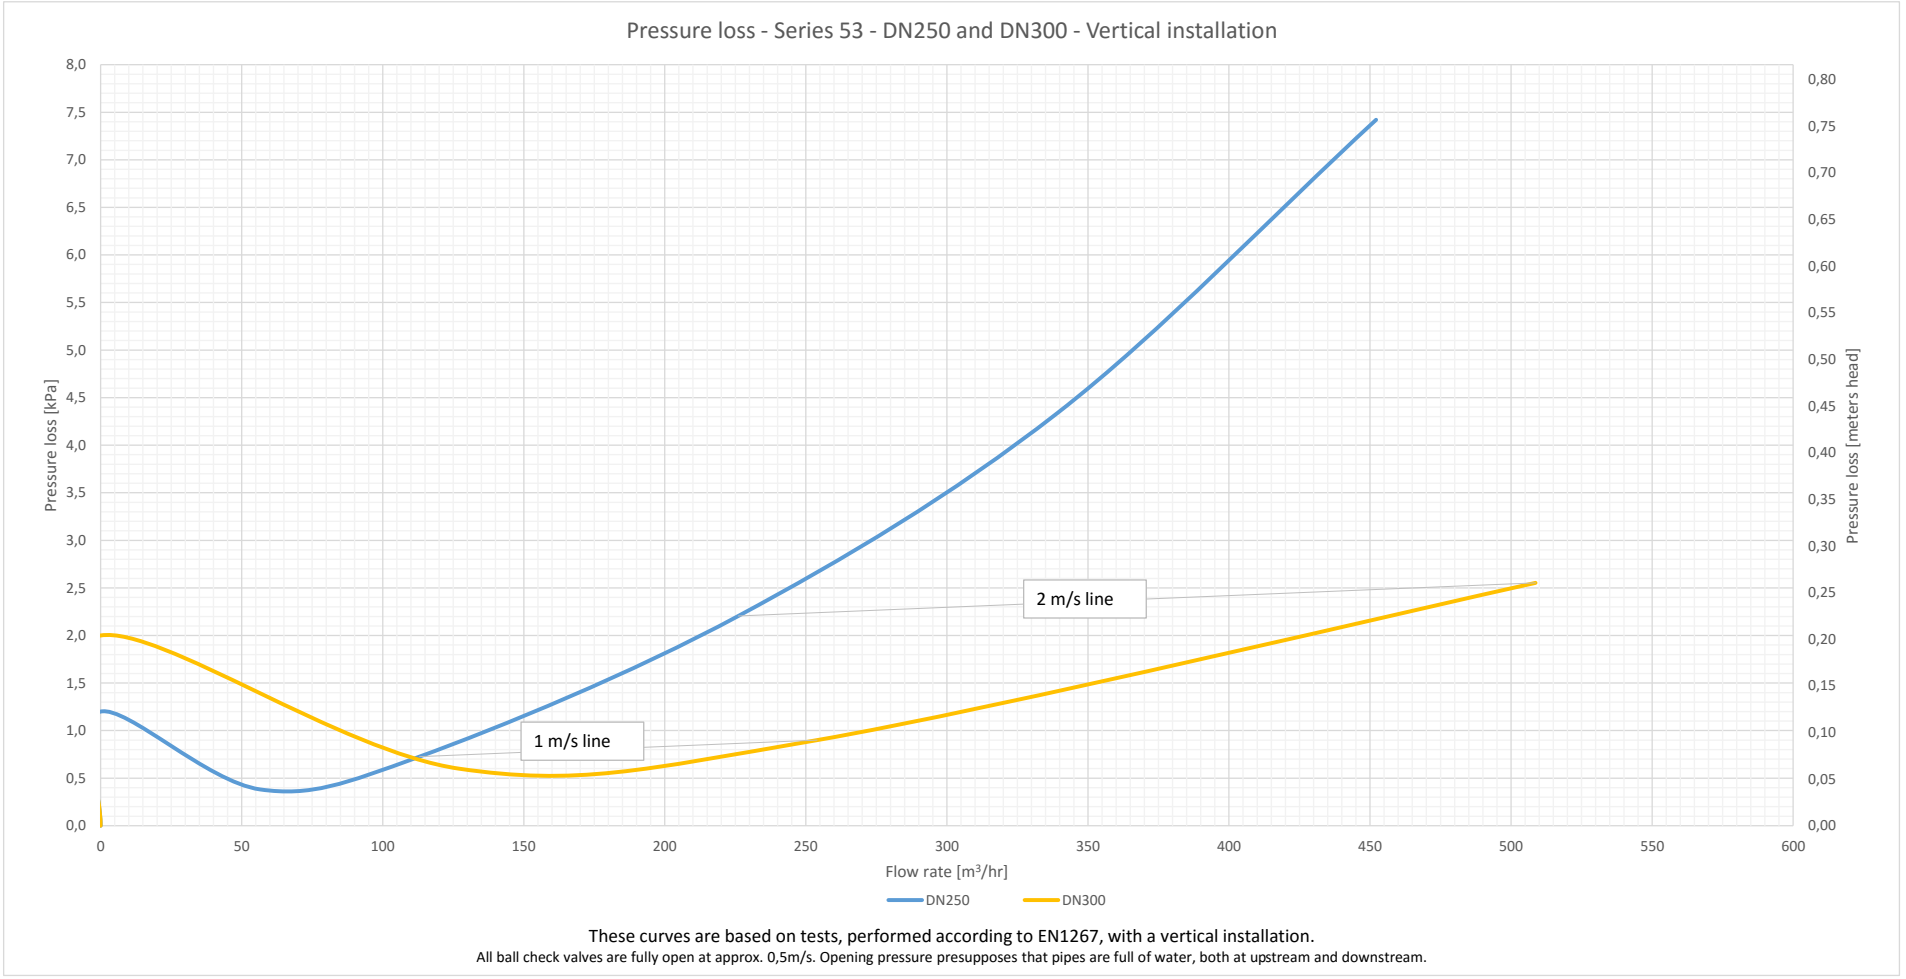

These curves are based on tests, performed according to EN1267, with a vertical installation.
All ball check valves are fully open at approx. 0,5m/s. Opening pressure presupposes that pipes are full of water, both at upstream and downstream.

COPYRIGHT©AVK GROUP A/S 2025 - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu